



Adaptor Bush - BSPT Male to BSP Female

Adaptor Bush – BSPT Male to BSP Female


Features:

- High Working Pressure
- Mild Steel - High Grade Material
- Sealing face and threads machined to high tolerance
- High Level Corrosion Resistance Plating (CR3 compliant)
- Available in Stainless Steel 316 or Cupro Nickel



Benefits:

- Highly resistant to leakage even under severe vibration, pressure pulsation and temperature

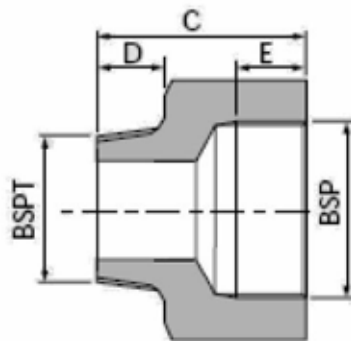

O/D mm	Thread BSP	Part No	L1 mm	L2 mm	C mm	A mm	B mm	E mm	D mm	Nut/AF mm	Body A/F mm	Max WP Bar
6	1/4"	KRAM6-4BJR	32	30	17	13	12	10	Ø29	16	19	680
8	1/4"	KRAM8-4BJR	32	30	17	13	12	10	Ø29	17	19	680
10	3/8"	KRAM10-6BJR	40	42	18	18	17	11	Ø38	27	22	680
12	3/8"	KRAM12-6BJR	40	42	18	18	17	11	Ø38	27	22	680
16	1/2"	KRAM16-8BJR	45	47	21	21	20	13	Ø45	32	27	680
20	3/4"	KRAM20-12BJR	56	63	26	25	26	16	Ø59	41	33	680
22	3/4"	KRAM22-12BJR	56	63	26	25	26	16	59	41	33	680
25	1"	KRAM25-16BJR	62	75	31	29	31	17	57	46	41	500
30	1"	KRAM30-16BJR	69	81	36	32	34	17	64	50	41	500
30	1-1/4"	KRAM30-20BJR	75	89	42	38	38	17	76	50	50	500
38	1-1/4"	KRAM38-20BJR	82	96	44	38	41	17	76	60	50	500
38	1-1/2"	KRAM38-24BJR	86	107	48	43	46	22	86	60	60	500